


REVISIONS			
REV	DESCRIPTION	DATE	APPROVAL
B	SEE DCN NO. 23877.	3/13/97	NM
C	UPDATE TO IED P/N, ADD 3 COND.	9/24/01	
D	UPDATE; OD WAS .225	12/3/01	
E	ECO_0087 RM ALT FOIL SHIELD E INSULATION W/ET	11/5/02	

WHT/BLK, 26 AWG.
WHT/BRN, 26 AWG.
WHT/RED, 26 AWG.
WHT/ORN, 26 AWG.
WHT/YEL, 26 AWG.
WHT/GRN, 26 AWG.
WHT/BLU, 26 AWG.
WHT/VIO, 26 AWG.
WHT/GRY, 26 AWG.
WHT, 26 AWG.
GRY/BLK, 26 AWG.
GRY/BRN, 26 AWG.
GRY/RED, 26 AWG.
GRY/ORN, 26 AWG.
GRY/YEL, 26 AWG.
BLK, 22 AWG.
RED, 22 AWG.
ORN, 26 AWG.
YEL, 26 AWG.
GRN, 26 AWG.
DRAIN WIRE, 26 AWG.

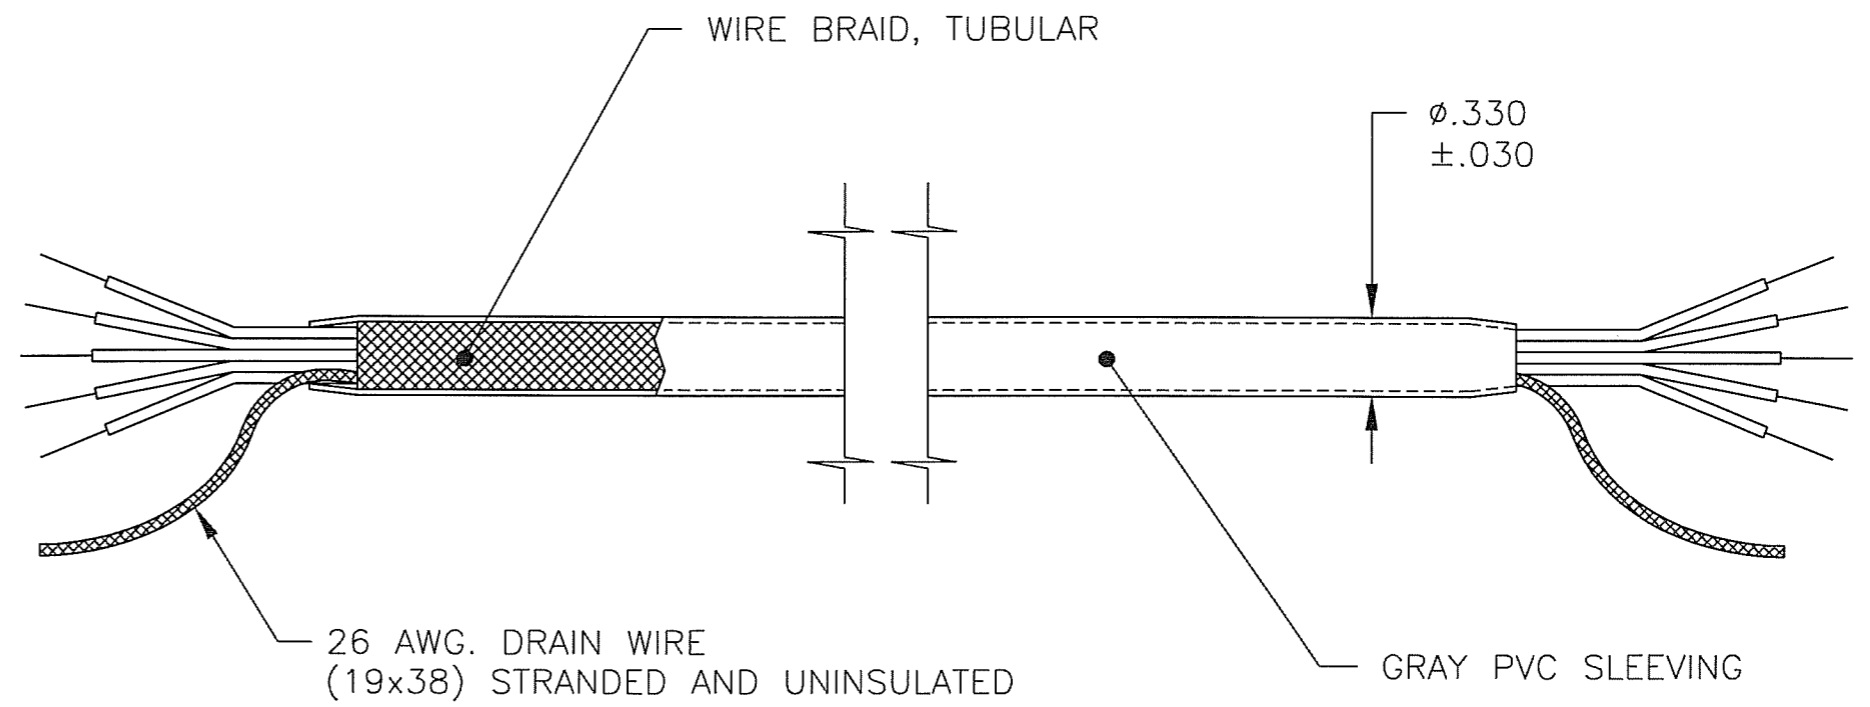

3. THE COLOR GRY IS EQUIVALENT TO BEI SLATE (SL or SLT).
2. VENDOR INFORMATION:
WIRENETICS P/N: TBD.
1. ALL 26 AWG. WIRES ARE 19x38 STRANDED WITH PTFE E INSULATION.
ALL 22 AWG. WIRES ARE 19x34 STRANDED WITH PTFE E INSULATION.
- NOTES: UNLESS OTHERWISE SPECIFIED.

		UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES. TOLERANCES ARE: FRACTIONS DECIMAL ANGLES ± 1/64 .XX ±.01 ±0' 30' .XXX ±.005		THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION OF BEI TECHNOLOGIES, INC. ANY REPRODUCTION, USE OR DISCLOSURE OF THIS DOCUMENT WITHOUT WRITTEN CONSENT OF BEI TECHNOLOGIES, INC. IS EXPRESSLY PROHIBITED.					
		REMOVE BURRS AND BREAK ALL SHARP EDGES .010 MAX. ALL DIA. TO BE © WITHIN .010		CONTRACT NO.		BEI INDUSTRIAL ENCODER DIVISION BEI TECHNOLOGIES, INC.			
		MATERIAL		APPROVALS	DATE	CABLE, SHIELDED 20 CONDUCTOR WITH DRAIN, 26 AWG)			
12 BIT		2.		DRAWN D. WONG	01-08-97				
NEXT ASSY	USED ON	FINISH		ENGINEER		SIZE B	FSCM NO. 1RB90	DWG. NO. 924-37063	REV. E
APPLICATION				APPROVED P.SAKAI	01-08-97	SCALE NONE	FILE: 898-06-0007.DWG	SHEET 1 OF 1	